

V-SERIES™ Standard & Leading-Edge SRLs



V-EDGE™ Leading-Edge SRL


V-TEC™ Standard SRL



WE KNOW WHAT'S AT STAKE.

V-TEC™ Standard SRLs

With premium components and innovative engineering, the V-TEC Standard SRL offers controlled cable retraction—preventing excessive lifeline retraction speed and protecting internal parts from damage.



1 Easy Inspection

Clear outer housing.




2 Easy Transportation

Carry handle included.



3 Assured Safety

Spiral radial energy-absorbing technology requires zero calibration or adjustment.



4 Downtime Minimized

Completely field-serviceable, the cable, energy-absorber, and retraction dampener can all be replaced on site.



5 Versatile

Available in 20 ft., 30 ft., 50 ft., and 90 ft.




6 Durable

Retraction dampening features control the cable speed to <math><10\text{ ft./s}</math> (3 m/s).



7 Built to Last

Stainless steel/engineered plastics.

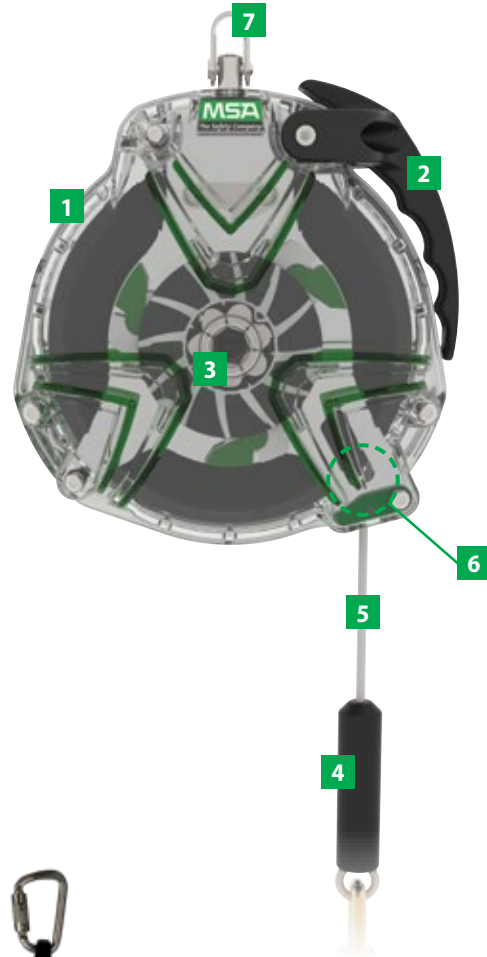

100 ft.
(30 m)



30 ft.
(10 m)



50 ft.
(15 m)



20 ft.
(6 m)

V-EDGE™ Leading-Edge SRLs

Specifically engineered and tested for use at foot-level tie off, the V-EDGE SRL meets ANSI Z359.14-2014 Leading-Edge requirements.

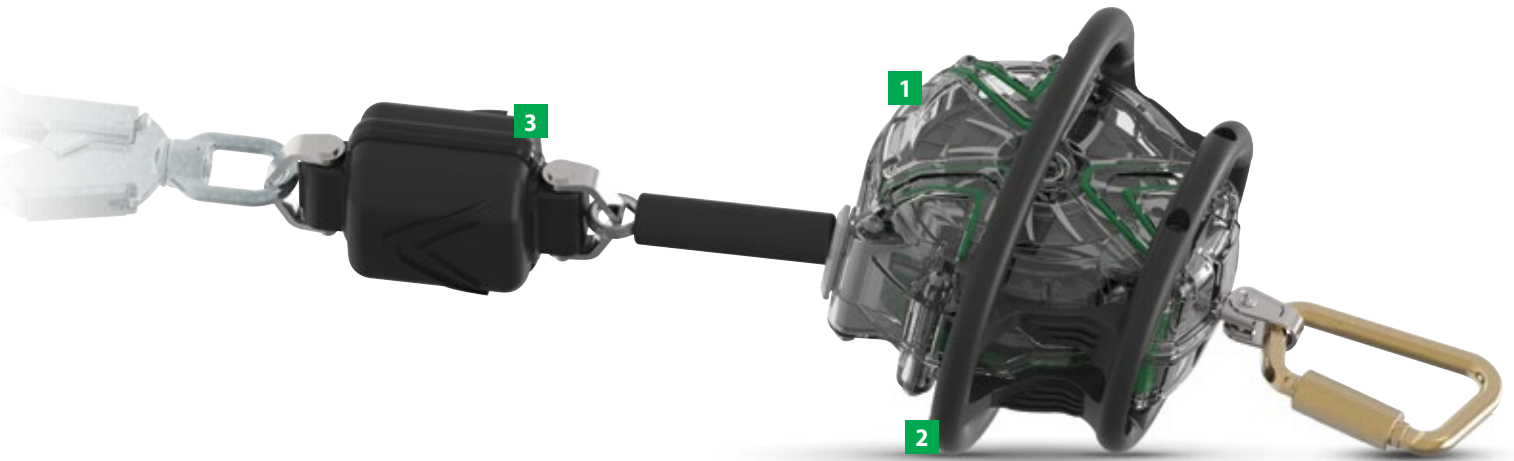

Simplify Selection

Use in a variety of applications, from overhead to horizontal tie off points, and where sharp edges are a concern.



Get to Work Faster

Clear outer casing allows for quick visual inspection of internal components




Lower Cost of Ownership

Integrated roll cage protects housing when used in foot-level tie off. Retraction dampening feature controls the life line speed—preventing unwanted damage and maximizing product life.



Reduce Downtime

Internal components like the cable and energy absorber can be replaced on site—reducing repair times.

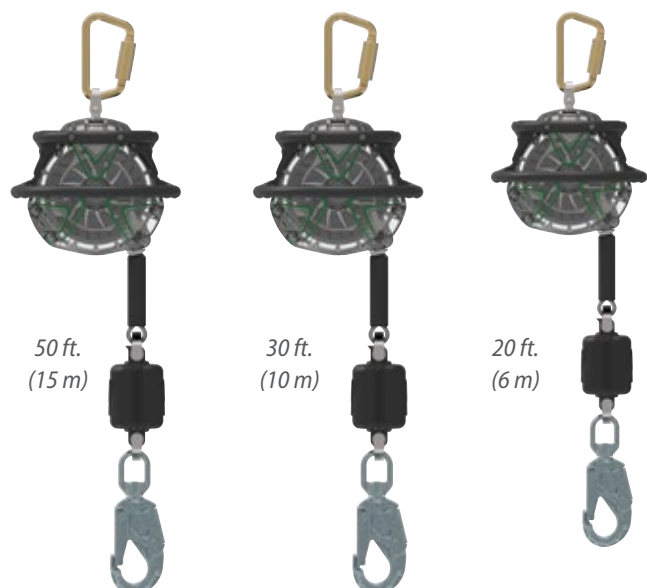

V-TEC Standard SRLs

Part Number	Cable Length	Cable Type		Approvals		
		Galvanized	Stainless Steel	OSHA	ANSI	CSA
63206-00A	20 ft. (6 m)	■		■	■	
63206-00ACA	20 ft. (6 m)	■				■
63210-00A	30 ft. (10 m)	■		■	■	
63210-00ACA	30 ft. (10 m)	■				■
63215-00A	50 ft. (15 m)	■		■	■	
63215-00ACA	50 ft. (15 m)	■				■
63230-00A	90 ft. (30 m)	■		■	■	
63230-00ACA	90 ft. (30 m)	■				■
63310-00A	30 ft. (10 m)		■	■	■	
63310-00ACA	30 ft. (10 m)		■			■
63315-00ACA	50 ft. (15 m)		■			■
63315-00A	50 ft. (15 m)		■	■	■	
63330-00A	100 ft. (30 m)		■	■	■	
63330-00ACA	100 ft. (30 m)		■			■

V-EDGE Leading-Edge SRLs

Part Number	Cable Length	Cable Type		Approvals		
		Galvanized	Stainless Steel	OSHA	ANSI	CSA
63406-00A	20 ft. (6 m)	■		■	■	
63406-00ACA	20 ft. (6 m)	■				■
63410-00A	30 ft. (10 m)	■		■	■	
63410-00ACA	30 ft. (10 m)	■				■
63415-00A	50 ft. (15 m)	■		■	■	
63415-00ACA	50 ft. (15 m)	■				■

Note: This Bulletin contains only a general description of the products shown. While product uses and performance capabilities are generally described, the products shall not, under any circumstances, be used by untrained or unqualified individuals. The products shall not be used until the product instructions/user manual, which contains detailed information concerning the proper use and care of the products, including any warnings or cautions, have been thoroughly read and understood. Specifications are subject to change without prior notice.

MSA operates in over 40 countries worldwide. To find an MSA office near you, please visit [MSAsafety.com/offices](https://www.msasafety.com/offices).